



SUPERLITE 40X56 LIGHTCONTAINER

GENERAL FEATURES

Aluminium truss, main tube Ø 50 mm x 2 mm and diagonal tube Ø 20 mm x 2 mm.

It can contain Euro 29, SuperLite 25, Elite 25 and Standard 25 linear trusses.

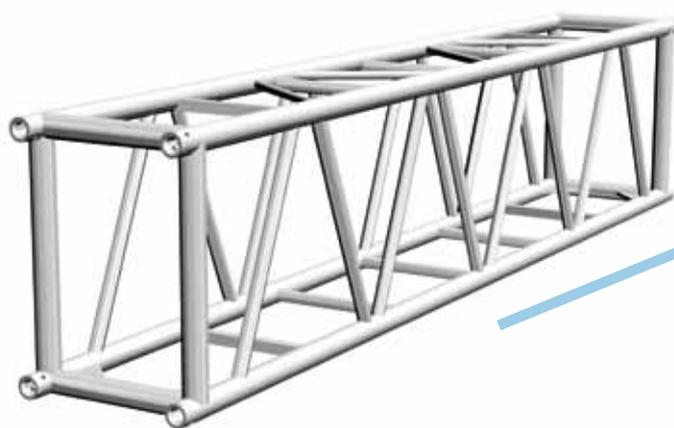


CODE	WEIGHT	DESCRIPTION
LINEAR TRUSSES		
TB 9006	20,28 kg	SuperLite 40x56 Truss 2,5 m (4 TB 8000 included)
TB 9008	23,60 kg	SuperLite 40x56 Truss 3,0 m (4 TB 8000 included)

CODE	WEIGHT	DESCRIPTION
ACCESSORIES		
TB 9206	3,70 kg	Aluminium sliding bar for 6 Light Par 64 (2,5 m) (rectangular tube 60x40 mm) (with 2 guiding sticks and clips)
TB 9208	3,90 kg	Aluminium sliding bar for 6 Light Par 64 (3 m) (rectangular tube 60x40 mm) (with 2 guiding sticks and clips)
TB 9201	0,98 kg	Kit: 4 wheels Ø 50 mm

ACCESSORIES:

TB 9201
Kit: 4 wheels 50 mm



TRUSS LENGTH	POINT LOAD	DISTRIBUTED LOAD
	▲	▲▲▲▲▲
4 m	1500	545
6 m	1050	350
8 m	680	170
10 m	500	100
12 m	360	60
14 m	280	40
16 m	180	25

LOADING FIGURES