




EURO 40

GENERAL FEATURES

Aluminium Truss 6082-T6 alloy, main tube \varnothing 50 x 2 mm, diagonal tube \varnothing 25 x 2 mm.

COUPLING SYSTEM

Double trunk-conical shaped spigot, quick pin and "R" clip are the best solution for high loading capacities. The wide range of accessories makes the product versatile both in a professional sphere and in situations where endusers need to rig heavy equipments (service organizers and show business operators).

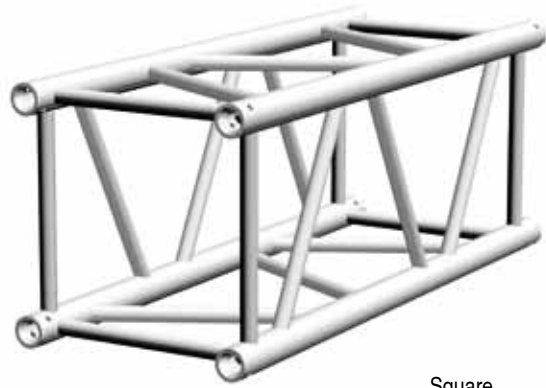


TB 12000
Euro coupling
Set



TA 12001
Euro double-conical
spigot

TA 12006
Euro quick pin



TA 8009
"R" clip 2 mm

TRUSS LENGTH	CODE	WEIGHT	DESCRIPTION
0,5 m	TB 124405	8,15 kg	Euro 40 Square Truss - 0,5 m
1,0 m	TB 124410	10,35 kg	Euro 40 Square Truss - 1 m
1,5 m	TB 124415	14,10 kg	Euro 40 Square Truss - 1,5 m
2,0 m	TB 124420	17,20 kg	Euro 40 Square Truss - 2 m
2,5 m	TB 124425	20,70 kg	Euro 40 Square Truss - 2,5 m
3,0 m	TB 124430	24,07 kg	Euro 40 Square Truss - 3 m
3,5 m	TB 124435	27,20 kg	Euro 40 Square Truss - 3,5 m
4,0 m	TB 124440	30,10 kg	Euro 40 Square Truss - 4 m

TRUSS LENGTH	SQUARE	
	▲	▲▲▲▲
4	1050	640
6	843	281
8	618	155
10	480	96
12	385	64
14	315	45
16	261	30

LOADING FIGURES