




EURO 29

GENERAL FEATURES


Aluminium Truss 6082-T6 alloy, main tube \varnothing 50 x 2 mm, diagonal tube \varnothing 20 x 2 mm.

COUPLING SYSTEM

Double trunk-conical shaped spigot, quick pin and "R" clip are the best solution for high loading capacities. The wide range of accessories makes the product versatile both in a professional sphere and in situations where endusers need to rig heavy equipments (service organizers and show business operators).

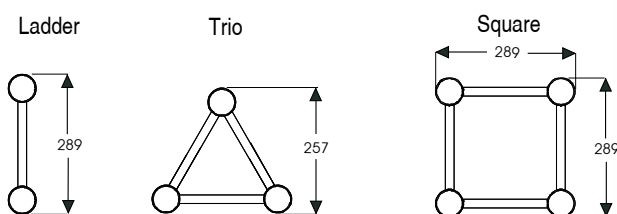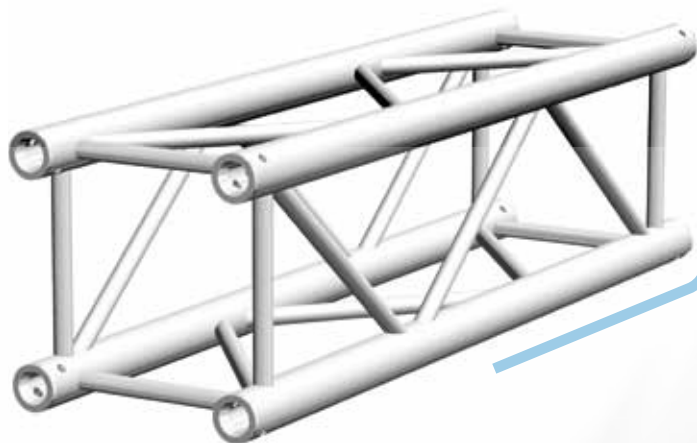

TB 12000
Euro coupling
Set



TA 12001
Euro double-conical
spigot



TA 12006
Euro quick pin



TA 8009
"R" clip 2 mm

| TRUSS LENGTH | LADDER CODE | LADDER WEIGHT | TRIO CODE | TRIO WEIGHT | SQUARE CODE | SQUARE WEIGHT |
|--------------|-------------|---------------|-----------|-------------|-------------|---------------|
| 0,5 m | TB 12205 | 2,54 kg | TB 12305 | 4,11 kg | TB 12405 | 5,42 kg |
| 1,0 m | TB 12210 | 3,75 kg | TB 12310 | 6,14 kg | TB 12410 | 8,05 kg |
| 1,5 m | TB 12215 | 4,97 kg | TB 12315 | 8,17 kg | TB 12415 | 10,68 kg |
| 2,0 m | TB 12220 | 6,19 kg | TB 12320 | 10,20 kg | TB 12420 | 13,31 kg |
| 2,5 m | TB 12225 | 7,40 kg | TB 12325 | 12,23 kg | TB 12425 | 15,94 kg |
| 3,0 m | TB 12230 | 8,62 kg | TB 12330 | 14,26 kg | TB 12430 | 18,56 kg |
| 3,5 m | TB 12235 | 9,84 kg | TB 12335 | 16,29 kg | TB 12435 | 21,19 kg |
| 4,0 m | TB 12240 | 11,05 kg | TB 12340 | 18,32 kg | TB 12440 | 23,82 kg |

LOADING FIGURES

| TRUSS LENGTH | LADDER | | TRIO | | SQUARE | |
|--------------|--------|-------|------|-------|--------|-------|
| | ▲ | ▲▲▲▲▲ | ▲ | ▲▲▲▲▲ | ▲ | ▲▲▲▲▲ |
| 4 m | 220 | 110 | 454 | 227 | 1037 | 518 |
| 6 m | 145 | 48 | 293 | 97 | 684 | 228 |
| 8 m | 105 | 26 | 209 | 52 | 462 | 115 |
| 10 m | 80 | 16 | 156 | 31 | 342 | 68 |
| 12 m | 64 | 11 | 119 | 19 | 258 | 43 |
| 14 m | - | - | 91 | 13 | 193 | 27 |
| 16 m | - | - | 68 | 9 | 141 | 16 |